



A BRAND OF
BONOMI
INDUSTRIES

**INSTALLATION, MAINTENANCE
AND OPERATING INSTRUCTIONS**
RuB Side Tap and Cap

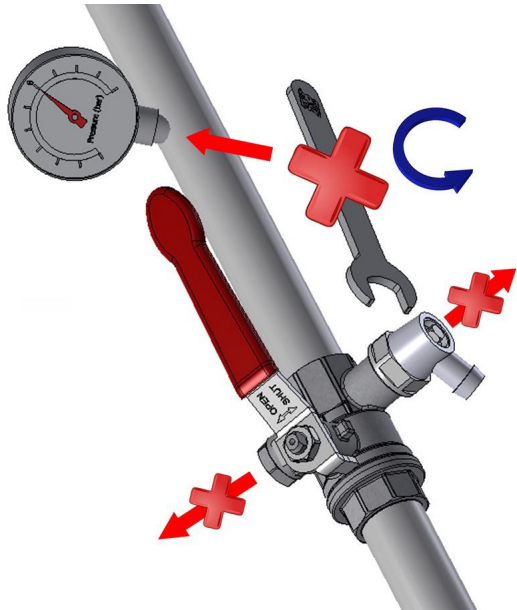

BONOMI INDUSTRIES s.r.l.
an ISO 9001 Company

Approved by




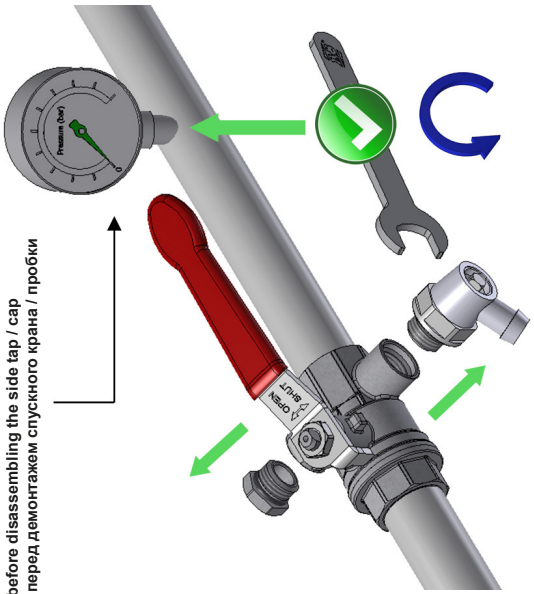

IMO045.03

Depressurize the line before disassembling the side tap / cap
Сбросить давление в линии перед демонтажем спускного крана / пробки

Side tap operating pressure: 10 bar Max
Максимальное применяемое давление спускного крана: 10 бар

The company reserves all rights for the information contained herein. Any undated reference to a code or standard shall be interpreted as referring to the latest edition. Products/documents may be changed at any time without notice.
Copyright **BONOMI INDUSTRIES s.r.l.**, November 2024. All rights reserved. Printed on recyclable paper. For complete disclaimer: www.rubvalves.com/disclaimer

Side tap operating temperature: 110°C Max
Максимально применяемая температура спускного крана: 110°C

BONOMI INDUSTRIES SRL
Via Padana Superiore 29, 25080 Mazzano (BS) - Italy
Tel: (+39) 030 212441 - Fax: (+39) 030 2629498
sales@rubvalves.com - www.bonomiindustries.com